




应用范围 Application

- ▶ 大会议厅、中小型多功能厅主扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- ▶ Main sound for Large conference hall, Small and medium sized multi-function hall, main sound of small and medium-sized touring performance, and supporting fills of large-scale sound-amplifying system

产品特性 Features

- ▶ GTS26SA是一款单12寸紧凑型线阵列有源低频音箱,内置3通道有源功放模块(1500W/8Ω×1;400W/8Ω×2),带DSP(1进3出)数字音频处理功能,内置可保存及调用预置程序;拥有高声压级输出和高保真扩声性能,搭配GTS26线阵列音箱组合吊挂或地面组合堆叠式使用,配置了两个力学优化式抽手,表面采用聚脲喷涂工艺,更结实耐磨。
- ▶ GTS26SA is single 12-inch compact line array active subwoofer, inside has 3-channel power amplifier module (1500W/ 8Ω-1; 400W/ 8Ω-2) with DSP (1-in 3 out); with high sound pressure level output and high-fidelity sound reinforcement performance, the system can be hang or ground stacked. Speaker box equipped with two handles, and adopts polyurea coating process, which is more strong and wear-resistant.

产品尺寸 Product dimension

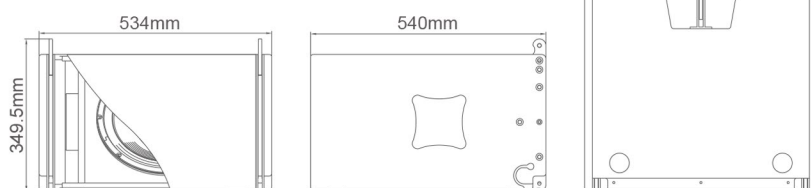

参数规格 Specifications

系统类型	单12寸带DSP有源超低音箱	System type	Active Single 12 inch Subwoofer with DSP
灵敏度(1W/1m)	96dB	Sensitivity(1W/1m)	96dB
频率响应	40Hz-300Hz(±3dB)/35Hz-350Hz(-10dB)	Frequency response	40Hz-300Hz(±3dB)/35Hz-350Hz(-10dB)
额定功率(AES)	1000W	Power rating(AES)	1000W
最大声压级(连续/峰值)	125dB/131dB	SPL(continue/peak)	125dB/131dB
标称阻抗	8Ω	Nominal Impedance	8Ω
低音单元	12寸低音(100mm音圈)	LF	12"(100mm Voice coil)
连接件	2×Neutrik NL4 Speakon四芯插座 (1+ 1-); 1×Neutrik XLR IN; 1×Neutrik XLR OUT; 1×USB控制接口; 2×Neutrik Powercon IN/OUT	Connection	2×Neutrik 4 PIN socket (1+ 1-); 1×Neutrik XLR IN;1×Neutrik XLR OUT; 1×USB Control connection;2×Neutrik Powercon IN/OUT
3通道D类放大器模块, 带DSP (1进3出)	输出功率4Ω: 750W×2; 输出功率8Ω: 600W×2; 1500W×1;	3 channel Class D amplifier module, with DSP(1in 3out)	Power output 4Ω: 750W×2; Power output 8Ω: 600W×2; 1500W×1
增益	38dB	Gain	38dB
信噪比S/N	115dB(A计权)	SNR	115dB(A)
工作电压范围	AC100-240V, 50/60Hz	Working voltage range	AC100-240V,50/60Hz
尺寸(H×W×D)	349.5×534×540mm	Dimension(H×W×D)	349.5×534×540mm
重量	28.3kg	Weight	28.3kg

